


ELECTRICAL CHARACTER:

- a. 100% OPEN&SHORT TESTING;
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- c. INSULATION RESISTANCE:10M Ohm(Min);
- d. CONDUCTIVE RESISTANCE:2 Ohm(Max).

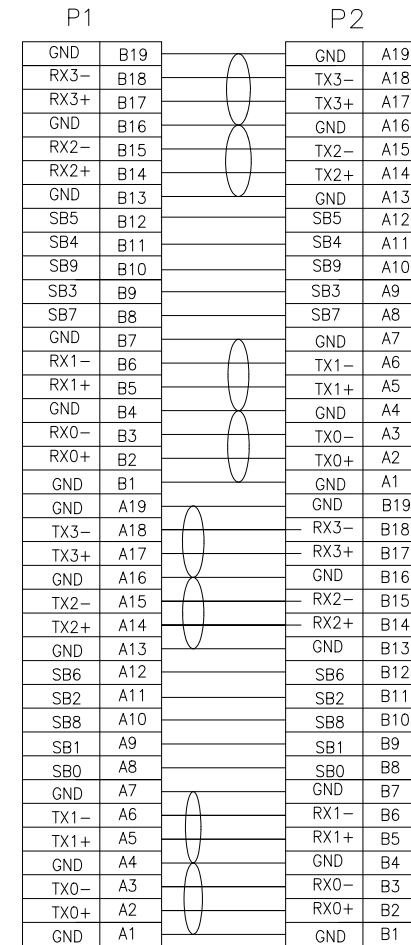

NO.	PART NAME	PART NO.	SPEC DESCRIPTION	QTY	UNIT
8	LATCH	AQ-3-MS21008	STAINLESS STEEL	2	pcs
7	EXPANDD	AQ-3-MS76001	PET BALCK OD: 10mm	A/R	mm
6	ACETATE TAPE	AQ-3-MS77001	W=25±5mm,BLACK	25	mm
5	MOLDING	AQ-3-GL100101	LDPE,NATURAL	A/R	9
4	MOLDING	AQ-3-GL100401	PBT+30GF% BLACK	A/R	9
3	PCBA	AQ-3-MS31019	SLIMSAS 4I PCB, PIN:15u&30u Au, 88±8 ohm	2	PCS
2	CABLE	AQ-3-MS40101	30AWG CABLE,OD:0.65	A/R	mm
1	CABEL	AQ-3-MS40208	(32AWG*2C+2D)AL+MYLAR,OD:0.65*1.54MM,85±5 ohm.	A/R	mm

TOLERANCE			INCHES		M/M		DIKWAN® DONGGUAN AIQUN INDUSTRIAL CO., LTD.				
.X	.015	.30					SCALE	NONE		REV	A0
.XX	.010	.10					UNIT	MM			
.XXX	.005	.05					DRAWN BY	TONY CHAN	SHEET	1/1	COSTOMER:
CHECK BY							DATE	16/07/02	DWG NO.:AQ1607-0214A		
APPD BY							TITLE: SLIMSAS 4I TO 4I				
							P/N: AQ-1-MS991010500				