

HSF







SPECIFICATION

Current Rating: 1.5 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T,UL 94V-0 Black

Ordering Code:

PHDR09 - X - X - T - A - D - B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 03 To 120
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3U" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type:
 T:Three
- ⑤ Pin Length:
 A:0400=4.00mm
 D:0075=0.75mm
 B:0280=2.80mm
 Please mark the desired length in the A/D/B
- ⑥ Insulator Material:
 A:PBT
 B:PA6T
 C:LCP
 D:PA46
 E:PA9T
- ⑦ Packing:
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

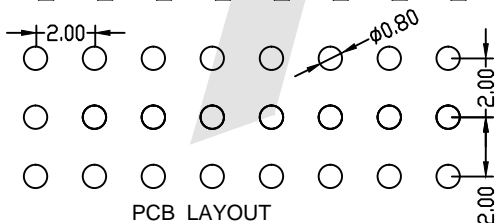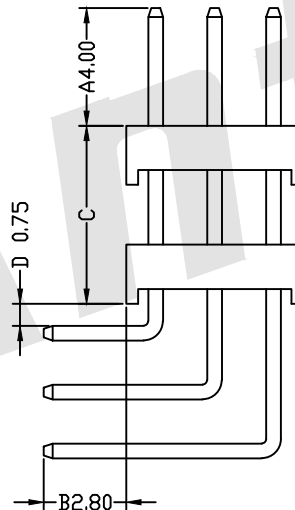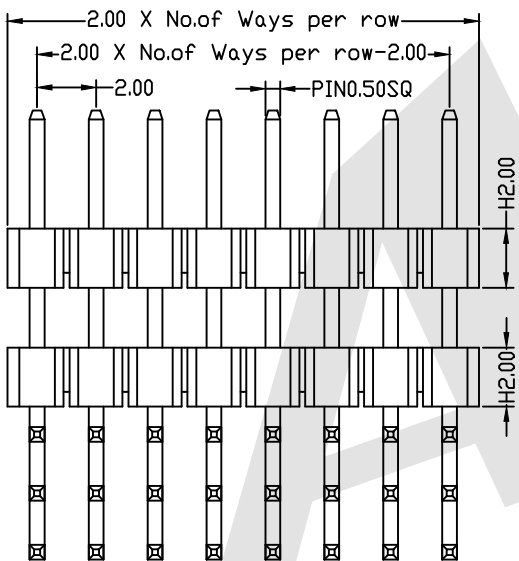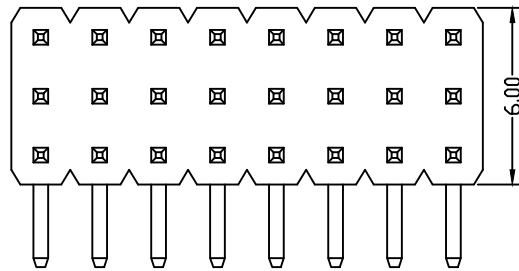

| | | | | | |
|--------------------------------------|------|--------------------|--------------------------------------|---|--|
| Standard IE P/N : | | | PHDR09-10-G0-T-0400-0075-0280-B-B | | |
| A | D | B | Unless Otherwise specified tolerance | | |
| 4.00 | 0.75 | 2.80 | X. ±0.35 | X. XX: ±0.20 | |
| | | | X. X: ±0.25 | X. XXX: ±0.15 | |
| Optional | | SCALE: As Shown | UNIT: mm | | |
| DRAW YG ZHONG | | DATE 01/05/2016 | | TITLE: 2.00mm Pin Header Three Row Double Plastic Angle Type | |
| CHECK BobYang | | DATE 01/05/2016 | | DRAWING NO: PHDR09-XXT-0400-0075-0280-XX | |
| REV | | DESCRIPTION | | PRODUCT NO: PHDR09-XXT-0400-0075-0280-XX | |
| Increase packing method and material | | 2016/10/25 | | | |
| | | DATE | | | |

Antenk ANTEK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

