

HSF








RoHS

Autodesk

Specifications(特性):


Current Rating(额定电流): 2.4A Max
 Contact Resistance(接触阻抗): 20 milliohms MAX
 Dielectric Withstanding Voltage(耐电压): 500V AC AT Sea Level
 Insulation Resistance(绝缘阻抗): 1000 Megohms MIN
 Operating Temperature:(工作温度): -40° C to +105° C
 Housing(塑胶): Temperature Thermoplastics, PBT UL 94V-0(耐高温塑胶 PBT)
 Contact(端子): Brass(铜) Matte Tin Over Ni(镍底度锡)

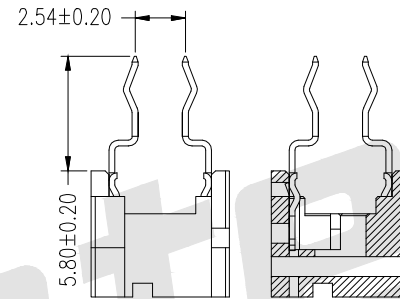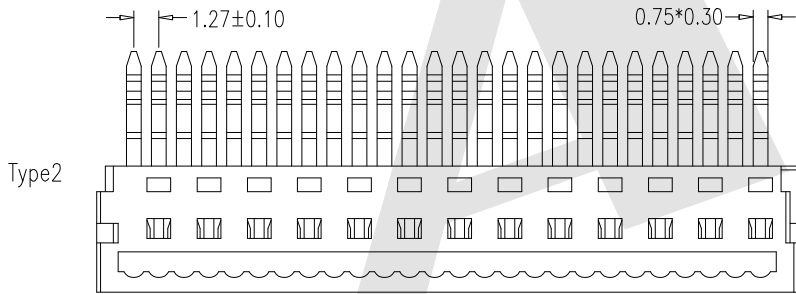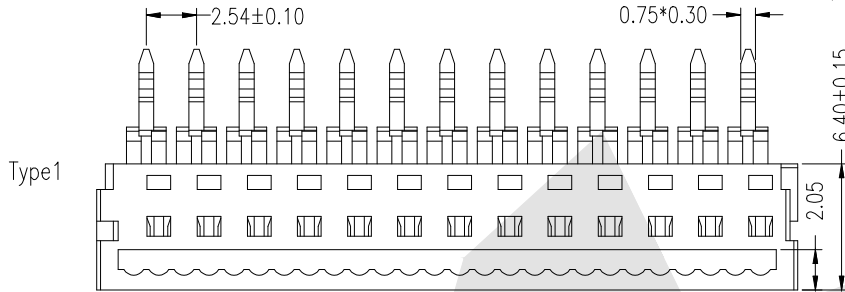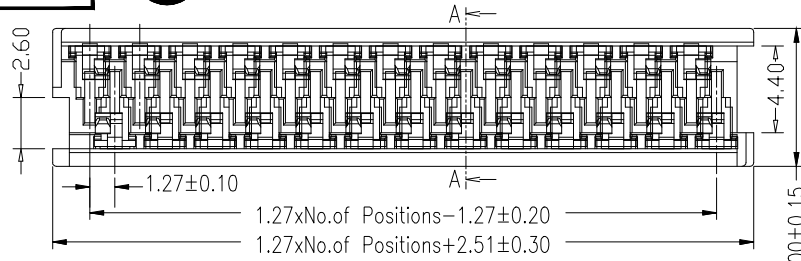

Ordering Code:

PFCS01 - X - X - X - X - X

- ① Series No:
- ② Option
A:Type1 B:Type2
- ③ No. of Contacts
04=4P 06=6P 08=8P
10=10P 12=12P 14=14P
16=16P 18=18P 20=20P
22=22P 24=24P 26=26P
- ④ Contact Plating
G0: Gold flash S0: Gold flash/Ni
G1: 3u" Gold S1: 3u" Gold/Ni
G2: 5u" Gold S2: 5u" Gold/Ni
G3: 10u" Gold S3: 10u" Gold/Ni
G4: 15u" Gold S4: 15u" Gold/Ni
G5: 30u" Gold S5: 30u" Gold/Ni
SN: Tin
- ⑤ Color Insulator
W:White
- ⑥ Packing
A:Tray
B:Bag
C:Tube
D:Tape Reel

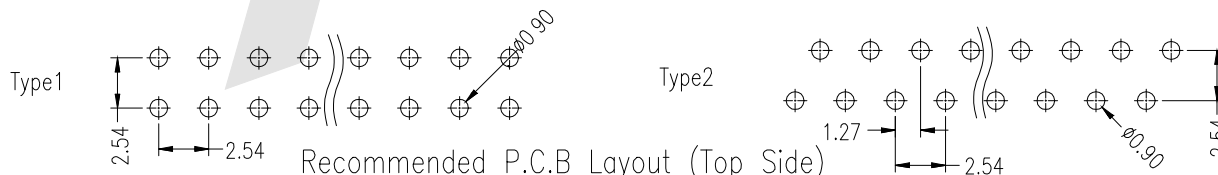

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm
 DRAW Gong Feng DATE 08/11/2017
 CHECK BobYang DATE 08/11/2017

TITLE: 1.27mm White IDC Type DIP For Cable



DRAWING NO: PFCS01-XXXXX
 PRODUCT NO: PFCS01-XXXXX

REV	DESCRIPTION	DATE

Autodesk