



SPECIFICATION

Current Rating: 3.0Amp
 Insulation Resistance: 1000MΩ min
 Contact Resistance: 20MΩ max
 Withstand Voltage: 1000V AC/DC
 Operating Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au Over Ni
 Latch plating: Ni
 Insulator Material: PBT +30%GF UL 94V-0

Ordering Code:

LHD101 - X - X - X - X - X

① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No. of Contacts
 06 08 10 12
 14 16 18 20
 24 26 30 34
 40 50 60 64

③ Contact Plating:

G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin

④ Color Insulator

B:Black
 U:Blue
 G:Gray




⑤ Insulator Material

A:PBT
 B:PA6T
 C:LCP
 D:PA46
 E:PA9T

⑥ Packing





A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

⑦ A:Short Latch
 B:Long Latch
 C:Without Latch

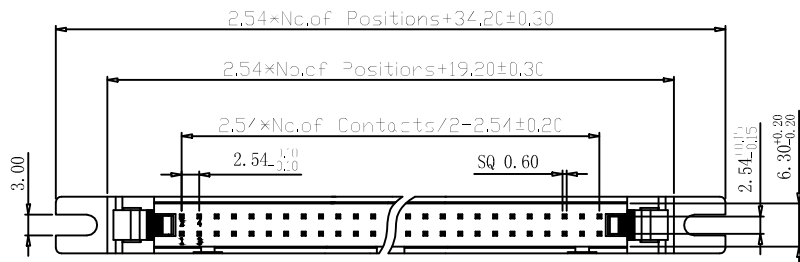

A:Short Latch

B:Long Latch

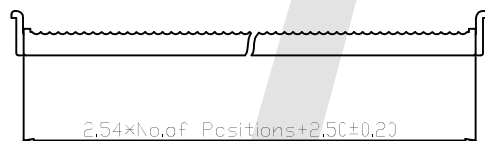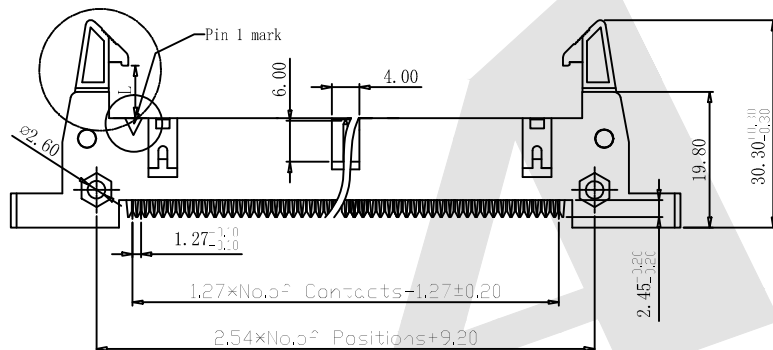


Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW YG ZHONG DATE 01/05/2016

CHECK BobYang DATE 01/05/2016



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: 2.54mm Ejector Header IDC Type
 With Mounting Ears

DRAWING NO: LHD101-XXXXXX

PRODUCT NO: LHD101-XXXXXX

REV	DESCRIPTION	DATE