

**HSF**

**ROHS**
**SPECIFICATIONS**

- Current rating: 1A AC/DC
- Voltage rating: 200V AC/DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ Min
- Temperature range: -40°C~+105°C
- Compliant with RoHS and REACH




**HOUSING**

- Part NO.: AH1253-xP
- Suitable: AT1253T series Terminal
- Mates with: AW1253 series Wafer
- Material: Nylon 66, UL94V-0
- Color: Reddish brown

**Ordering Information & Dimensions:**

Poles	Part No.	Dimensions (mm)	
		A	B
02	AH1253-02P	1.25	3.95
03	AH1253-03P	2.50	5.20
04	AH1253-04P	3.75	6.45
05	AH1253-05P	5.00	7.70
06	AH1253-06P	6.25	8.95
07	AH1253-07P	7.50	10.20
08	AH1253-08P	8.75	11.45
09	AH1253-09P	10.00	12.70
10	AH1253-10P	11.25	13.95
11	AH1253-11P	12.50	15.20
12	AH1253-12P	13.75	16.45
13	AH1253-13P	15.00	17.70
14	AH1253-14P	16.25	18.95
15	AH1253-15P	17.50	20.20

Unit:mm

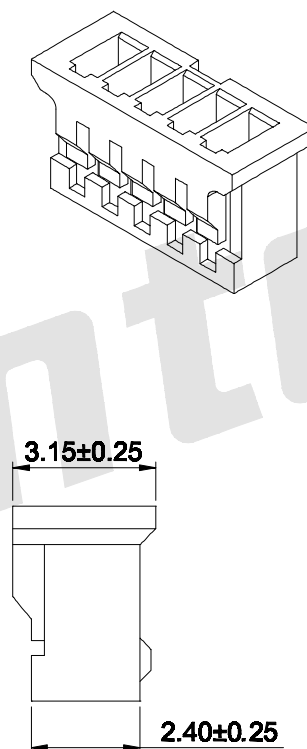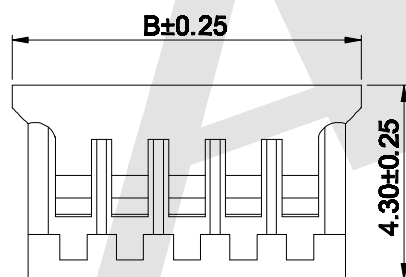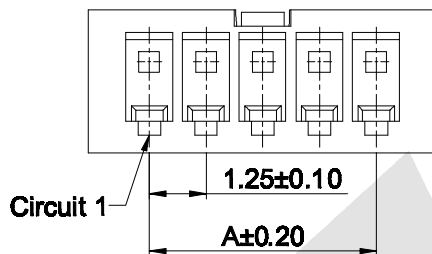

Unless Otherwise specified tolerance  
 X ±0.35 X XX:±0.20  
 X X:±0.25 X XXX:±0.15

SCALE: As Shown UNIT: mm  
 DRAW Jack Bao DATE 11/04/2017  
 CHECK Bob Yang DATE 11/04/2017



**Antenk** ANTENK ELECTRONICS CO.,LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

TITLE: 1.25mm pitch Housing Connector Series

DRAWING NO: AH1253-xP

PRODUCT NO: AH1253-xP

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		