



HSF




ROHS

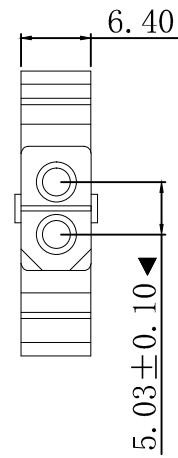


AH5031-02P
AH5031NE-02P

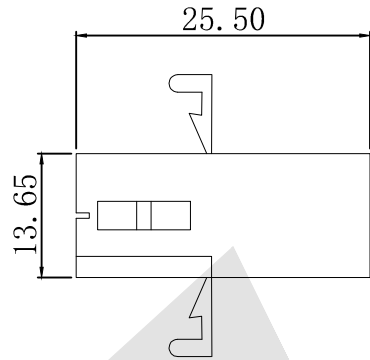



AH5031-04P
AH5031NE-04P (Without Ears)

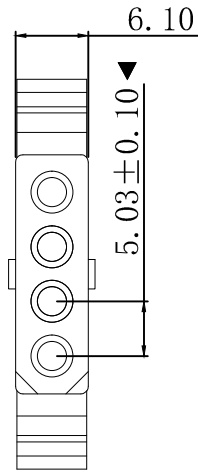




AH5031-05P
AH5031NE-05P

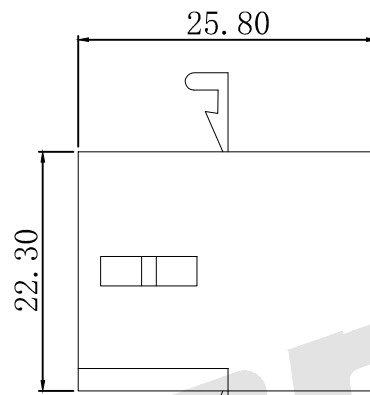

AH5031-01P

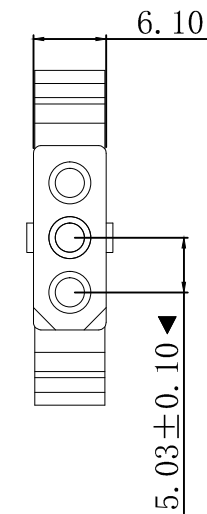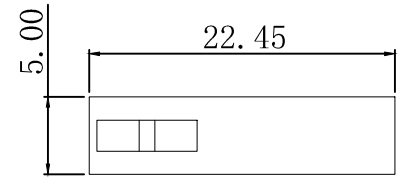

AH5031-03P
AH5031NE-03P

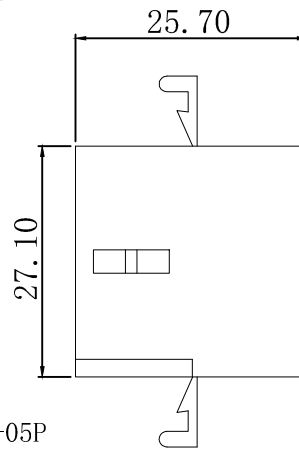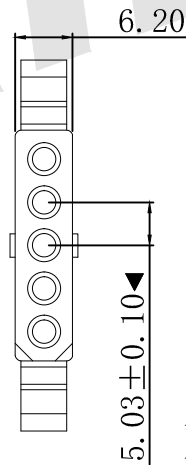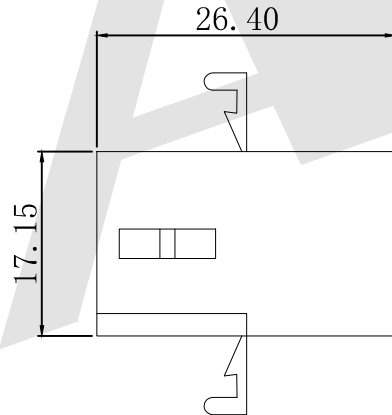

SPECIFICATIONS

- Voltage rating: 250V AC,DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C +85°C
- Contact resistance: 20mΩ max

HOUSING

- Part NO: AH5031-1xNP
- Poles: 01-05P
- Housing Material: Nylon66 UL94v-2
- The Dimension Marked “▼” Must Be Recorded

Unless Otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15




ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 08/14/2017
CHECK Bob Yang	DATE 08/14/2017

TITLE: 5.03mm Male Housing Connector Series

DRAWING NO: AH5031-1xNP

PRODUCT NO: AH5031-1xNP



REV	DESCRIPTION	DATE