



HSF

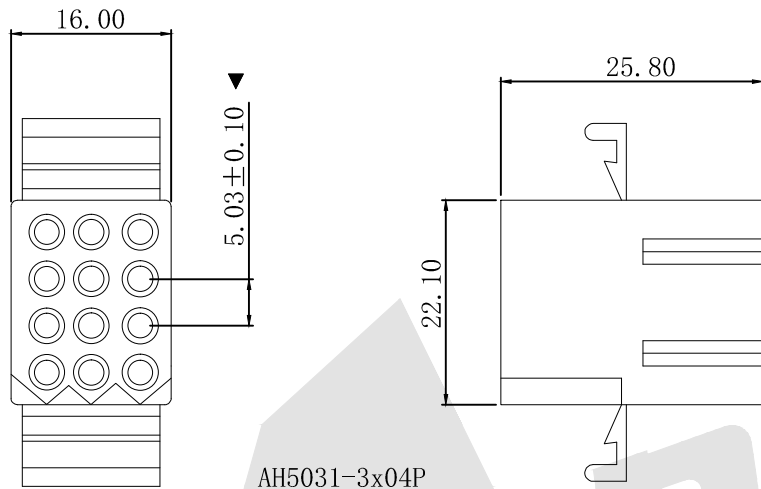

AH5031-3x04P  
AH5031NE-3x04P

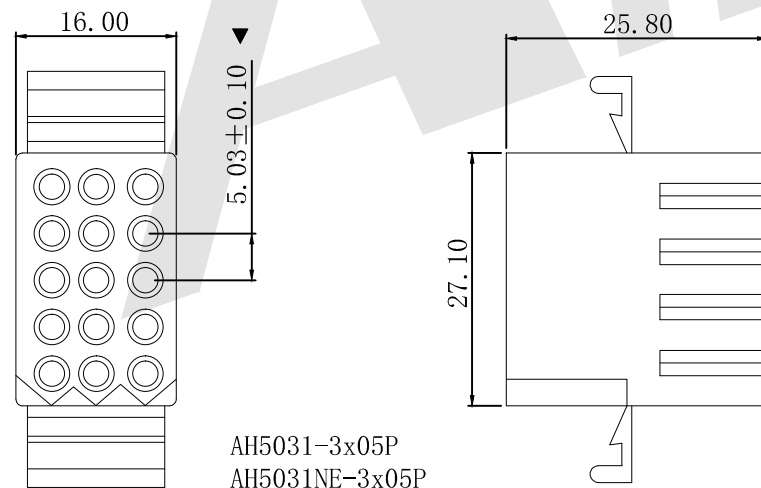


AH5031-3x05P  
AH5031NE-3x05P

SPECIFICATIONS

- Voltage rating: 250V AC/DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C~+85°C
- Contact resistance: 20mΩ max

HOUSING

- Part NO: AH5031-3xNP
- Poles: 04-15P
- Housing Material: Nylon66 UL94v-2
- The Dimension Marked “▼” Must Be Recorded

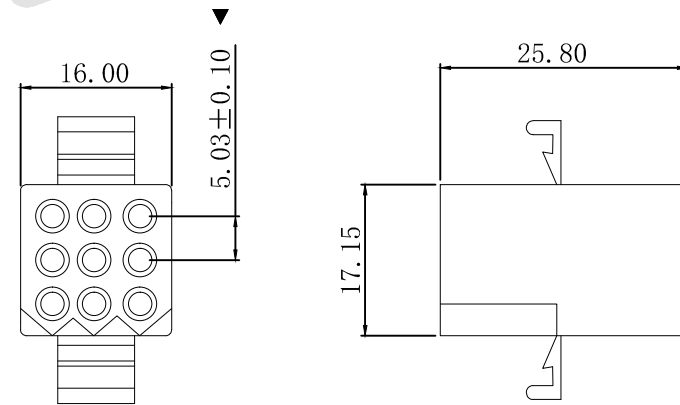


AH5031-3x03P  
AH5031NE-3x03P

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

**Antenk**® ANTENK ELECTRONICS CO., LTD  
[Http://www.antenk.com](http://www.antenk.com)  
 E-mail:sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 08/26/2017
CHECK Bob Yang	DATE 08/26/2017

TITLE: 5.03mm Male Housing Connector Series



DRAWING NO: AH5031-3xNP

PRODUCT NO: AH5031-3xNP

REV	DESCRIPTION	DATE