




HSF




ROHS

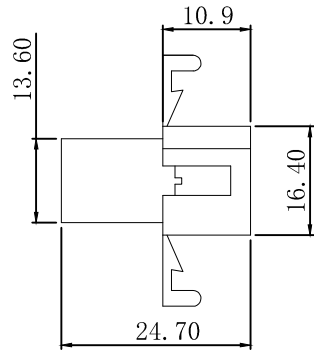

AH5032-02P
AH5032NE-02P

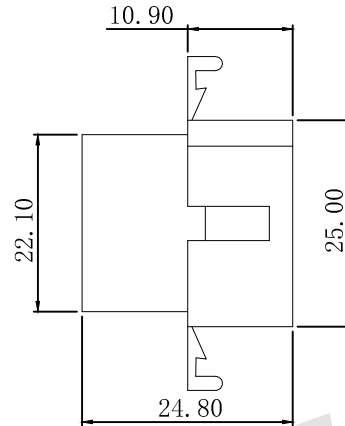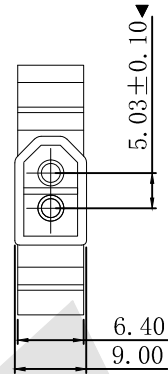

AH5032-04P
AH5032NE-04P

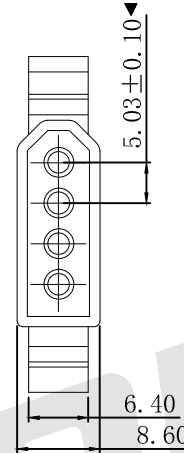


SPECIFICATIONS



- Voltage rating: 250V AC/DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C~+85°C
- Contact resistance: 20mΩ max

HOUSING



- Part NO: AH5032-1xNP
- Poles: 01-05P
- Housing Material: Nylon66 UL94v-2
- The Dimension Marked "▼" Must Be Recorded

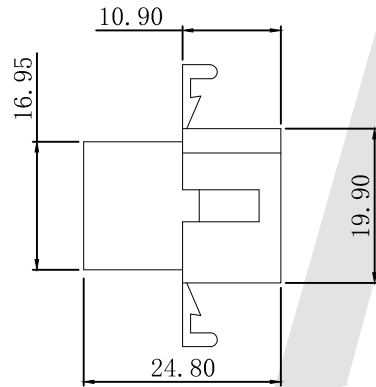

AH5032-03P
AH5032NE-03P

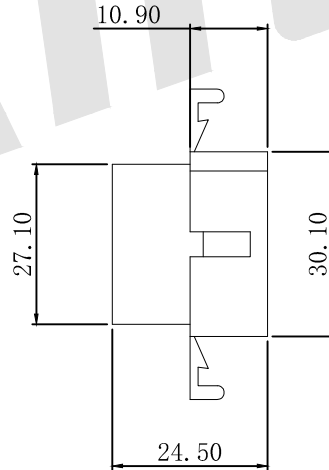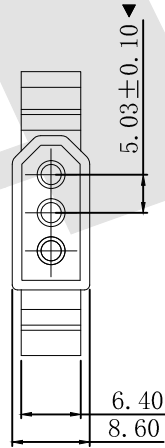

AH5032-05P
AH5032NE-05P

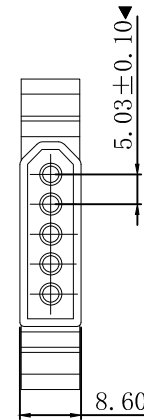

AH5032-01P



Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
DRAW: Jack Bao DATE: 08/14/2017
CHECK: Bob Yang DATE: 08/14/2017




ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 5.03mm Female Housing Connector Series

DRAWING NO: AH5032-1xNP

PRODUCT NO: AH5032-1xNP



REV	DESCRIPTION	DATE