

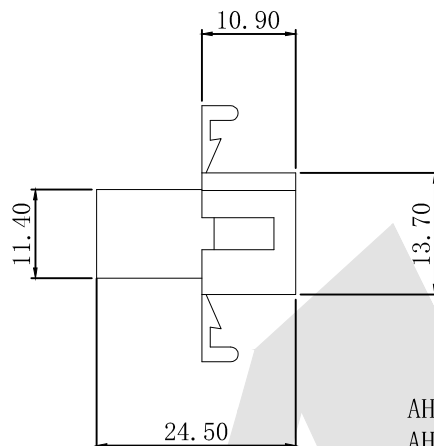


HSF


RoHS



AH5032-2x02P
AH5032NE-2x02P

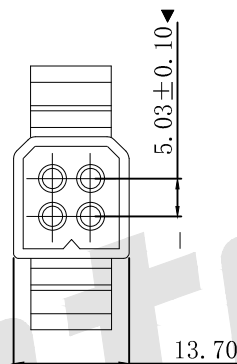

AH5032-2x03P
AH5032NE-2x03P



SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C~+85°C
- Contact resistance: 20mΩ max

HOUSING


- Part NO: AH5032-2xNP
- Poles: 04-06P
- Housing Material: Nylon66 UL94v-2
- The Dimension Marked “▼” Must Be Recorded

Unless otherwise specified tolerance
 X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

Antenk® ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail: sales@antenk.com

SCALE: As Shown	UNIT: mm
DRAW Jack Bao	DATE 08/14/2017
CHECK Bob Yang	DATE 08/14/2017

TITLE: 5.03mm Female Housing Connector Series



DRAWING NO: AH5032-2xNP

PRODUCT NO: AH5032-2xNP

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		