


PIN ASSIGNMENT:

Mini SAS 4i(HOST)      SATA 7P(TARGET)

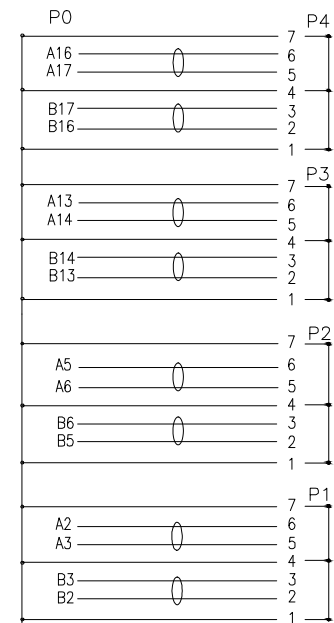

A1;A4;A7;A12;A15;A18  
B1;B4;B7;B12;B15;B18

FORWARD

NOTE:  
1.100%OPEN&SHORT TESTIGN,  
2.INSULATION RESISTANCE 10M Ωhm MIN DC300V  
3.CONDUCTIVE RESISTANCE: 2 Ωhm MAX

10	LABLE	AQ-5-MS5039	W6*L24, PRINT "P1&P2&P3&P4"	4	pcs
9	CONN.	AQ-3-GL51S01	SATA 7P/F,PING/F	4	pcs
8	EXPANDD	AQ-3-MS76001	PET BALCK DD: 10mm	A/R	mm
7	ACETATE TAPE	AQ-3-MS77001	W=25±5mm,BLACK	2	pcs
6	MOLDING	AQ-3-GL145201	45P PVC BLACK	A/R	g
5	MOLDING	AQ-3-GL100101	LDPE,NATURAL	A/R	g
4	MOLDING	AQ-3-GL100401	PBT+30%GF BLACK	A/R	g
3	LATCH	AQ-3-MS21008	STAINLESS STEEL	5	pcs
2	PCB	AQ-3-MS31019	MINI SAS 36PIN PCB, PIN:Au 15u", 100±10 ohm	1	PCS
1	CABLE	AQ-3-MS40208	(30AWG*2C+2d)*AL+MYLAR,DD:0.97*2.17MM,100±5 ohm.	A/R	mm
NO.	PART NAME	PART NO.	SPEC DESCRIPTION	QTY	UNIT

A	INITIAL RELEASE			12/10/12
REV	DESCRIPTION OF CHANGE			DATE
TOLERANCE		INCHES		
		MM		
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY	TONY CHAN			
CHECK BY				
CUSTOMER P/N:	P/N: AQ-1-MS1S4010500			
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	CUSTOMER:		
DATE	16/04/10	DWG NO:		
TITLE: MINI SAS 36P TO 4*SATA				

DIKWAN® DONGGGUAN AIQUN INDUSTRIAL CO.,LTD.