




WIRING TABLE

P1		P2		P3	
KEY		KEY		KEY	
1	DRAIN WIRE	S1		P13,P14,P15	P13,P14,P15
2		S2		P10,P11,P12	P10,P11,P12
3		S3		P7,P8,P9	P7,P8,P9
4	DRAIN WIRE	S4		P4,P5,P6	P4,P5,P6
5		S5		P1,P2,P3	P1,P2,P3
6		S6			
7	DRAIN WIRE	S7			

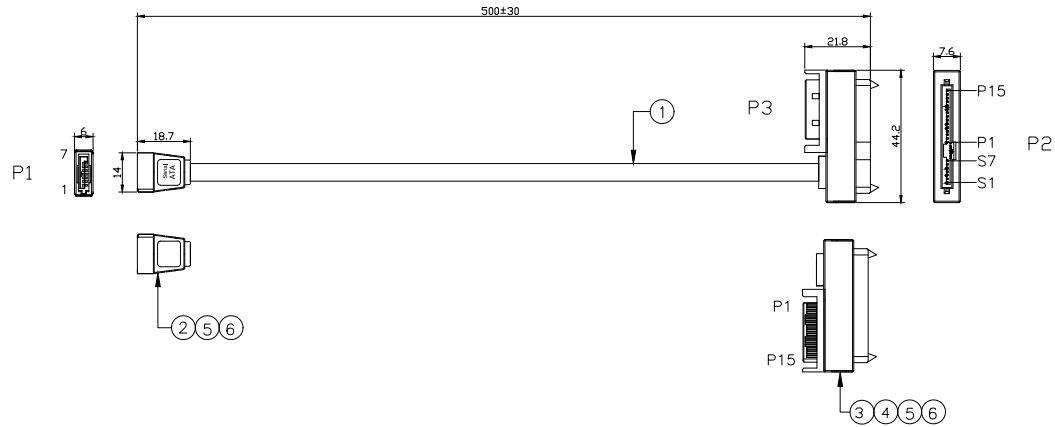

NOTES:
 1.100% OPEN&SHORT WITH MISS WIRE TEST
 2.TEST CONDITION:
 1).CONDUCTANCE RESISTANCE:2 ohm
 2).SHORT OPEN DETERMINANT:20K ohm
 3).INSULATION RESISTANCE:10M ohm AT DC300V.

A		INITIAL RELEASE		13/03/01	
REV	DESCRIPTION OF CHANGE		DATE		
6	MOLDING	AQ-3-GL145201	PVC45P BLACK	A/R	G
5	MOLDING	AQ-3-GL100101	LDPE	A/R	G
4	CONN.	AQ-3-GL51S02	SAS 29P/F,PIN:G/F	1	PCS
3	CONN.	AQ-3-GL51S03	SATA 15P/M,PIN:G/F	1	PCS
2	CONN.	AQ-3-GL51S01	SATA 7P/F,PIN:G/F	1	PCS
1	CABLE	AQ-3-GL40406	((30AWG*2C+2D)*AL)*2 OD:1.8*6.8MM,RED PVC	A/R	MM
NO.	PART NAME	PART NO	SPEC DESCRIPTION	QTY	UNIT

TOLERANCE		INCHES		M/M	
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05			

DRAWN BY TONY CHAN		SCALE NONE	UNIT MM	REV A
CHECK BY		SHEET 1/1	CUSTOMER:	
CUSTOMER. P/N:		DATE 16-04-18	DWG NO.:	
P/N:		TITLE: SATA TO SAS 29P+15P SATA		