


UNS 型

活塞杆用密封件

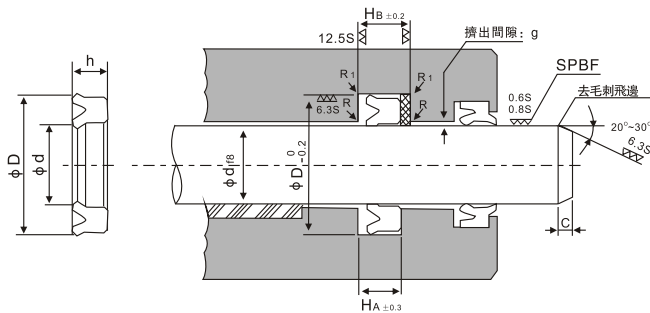

$R \leq 0.2$
 $R_1 \leq 0.4$

活塞杆表面應當拋光(SPBF)或(RLB)到0.8~1.6 μmRmax (0.2~0.4 μmRa), 特別是在惡劣的潤滑條件下, 更需要拋光。

名義號	φd	φD	h	HA	HB	C	KVK零件號	單價¥
UNS-6.3	6.3	16.3	8	9	10.5	3	43141	9.6
UNS-7.1	7.1	17.1	8	9	10.5	3	43142	9.6
UNS-8	8	18	8	9	10.5	3	43143	9.6
UNS-9	9	19	8	9	10.5	3	43144	9.6
UNS-10	10	20	8	9	10.5	3	43145	9.6
UNS-11.2	11.2	21.2	8	9	10.5	3	43146	10.2
UNS-12.5	12.5	22.5	8	9	10.5	3	43147	10.2
UNS-14	14	24	8	9	10.5	3	43148	10.2
UNS-15	15	25	8	9	10.5	3	43149	10.2
UNS-16	16	26	8	9	10.5	3	43150	10.2
UNS-18	18	28	8	9	10.5	3	43151	10.2
UNS-20	20	30	8	9	10.5	3	43152	10.4
UNS-22.4	22.4	32.4	8	9	10.5	3	43153	10.4
UNS-25	25	35	8	9	10.5	3	43154	10.4
UNS-28	28	43	10	11	10.5	3	43155	14.8
UNS-30	30	45	10	11	12.5	4	43156	14.8
UNS-31.5	31.5	46.5	10	11	13	4	43157	14.8
UNS-35	35	50	10	11	13	4	43158	16
UNS-35.5	35.5	50.5	10	11	13	4	43159	16
UNS-40	40	55	10	11	13	4	43160	21.2
UNS-45	45	60	10	11	13	4	43161	23.2
UNS-48	48	63	10	11	13	4	43162	23.2
UNS-50	50	65	10	11	13	4	43163	23.2
UNS-53	53	73	12	13	15	5	43164	31.6
UNS-55	55	75	12	13	15	5	43165	33.8
UNS-56	56	76	12	13	15	5	43166	33.8
UNS-60	60	80	12	13	15	5	43167	38.2
UNS-63	63	83	12	13	15	5	43168	42.2
UNS-65	65	85	12	13	15	5	43169	46
UNS-67	67	87	12	13	15	5	43170	45.6
UNS-70	70	90	12	13	15	5	43171	45.6
UNS-71	71	91	12	13	15	5	43172	46.6
UNS-75	75	95	12	13	15	5	43173	47.6
UNS-80	80	100	12	13	15	5	43174	47.6
UNS-85	85	105	12	13	15	5	43175	52.8
UNS-90	90	110	12	13	15	5	43176	54
UNS-95	95	115	12	13	15	5	43177	55

名義號	φd	φD	h	HA	HB	C	KVK零件號	單價¥
UNS-100	100	120	12	13	15	5	43178	61.4
UNS-105	105	125	16	17	20	5	43179	72
UNS-106	106	126	16	17	20	5	43180	72
UNS-110	110	130	16	17	20	5	43181	73.8
UNS-112	112	132	16	17	20	5	43182	75.2
UNS-118	118	138	16	17	20	5	43183	77.2
UNS-120	120	140	16	17	20	5	43184	78
UNS-125	125	145	16	17	20	5	43185	78
UNS-130	130	150	16	17	20	5	43186	81.4
UNS-140	140	160	16	17	20	5	43187	85.6
UNS-150	150	170	16	17	20	5	43188	97.2