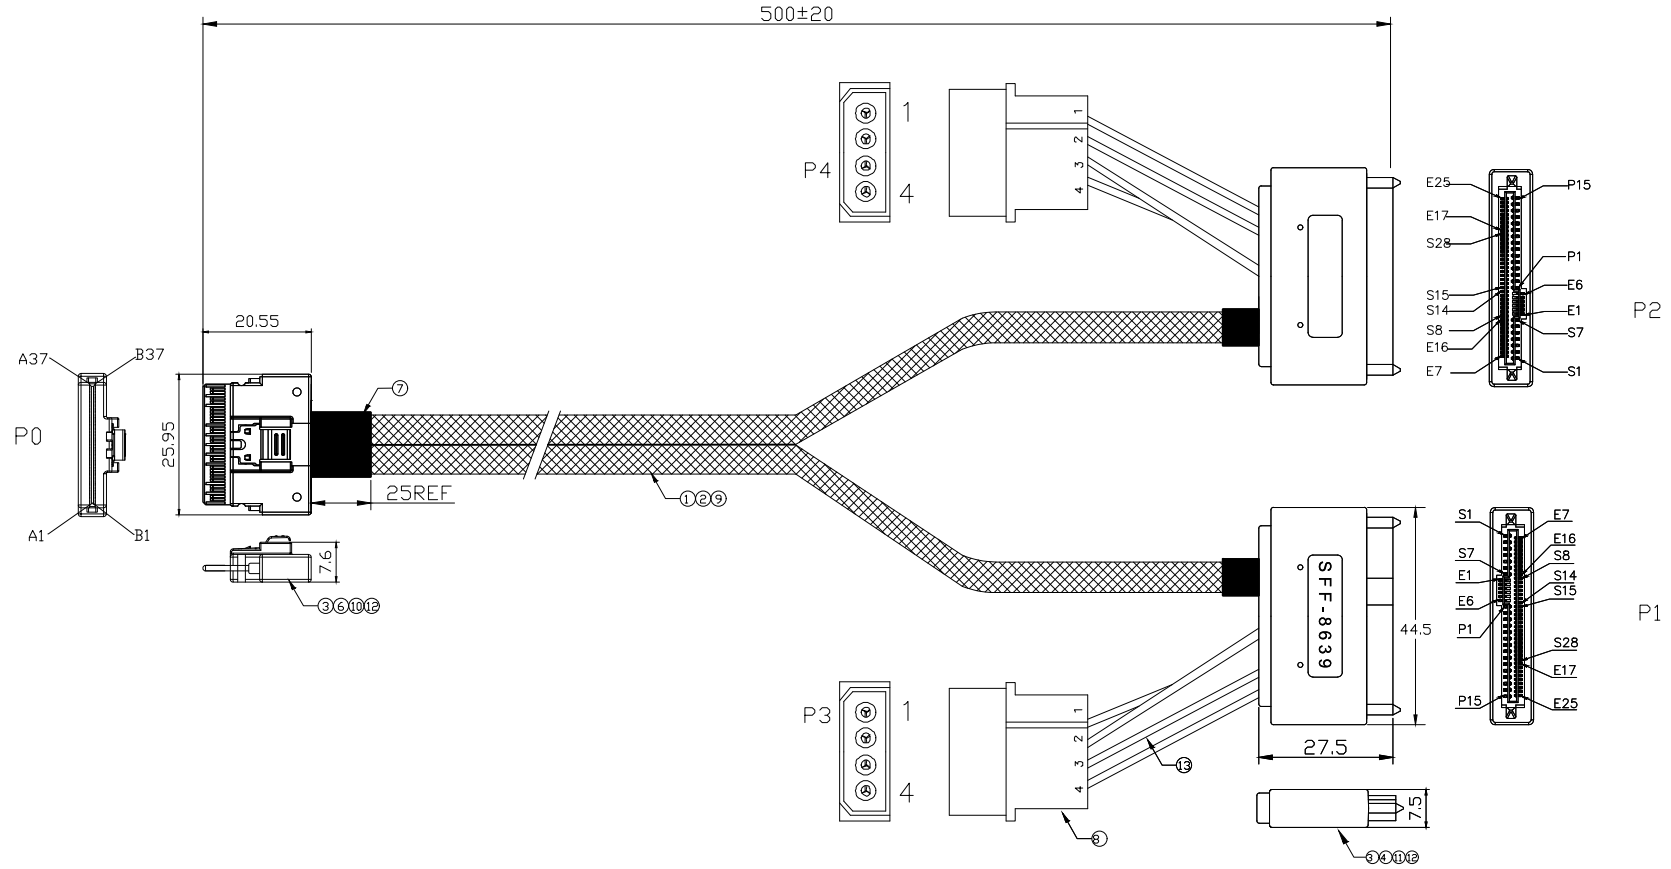

NO.	NAME	P/N	MATERIAL DESCRIPTION	Q'TY	UNIT
⑬	CABLE	AQ-3-MS40108	20AWG (RED/BLACK/YELLOW)	A/R	M
⑫	MOLDING	AQ-3-GL100101	LDPE,NATURAL	A/R	KG
⑪	MOLDING	AQ-3-GL145201	45P PVC BLACK	A/R	KG
⑩	MOLDING	AQ-3-GL100401	PBT+30GF% BLACK	A/R	KG
⑨	EXPANDO	AQ-3-MS76001	PET BALCK □D: 10mm	A/R	M
⑧	CONN.	AQ-3-MS51S03	4P,NATURAL,PH5.08,PIN:G/F	2	pcs
⑦	ACETATE TAPE	AQ-3-MS77001	W=25±5mm	A/R	M
⑥	LATCH	AQ-3-MS21008	STAINLESS STEEL	1	PCS
⑤	PCB	AQ-3-MS31019	SLIMSAS 8I PCB, PIN:15u&30u Au, 88±8 ohm	1	PCS
④	CONN	AQ-3-MS51S05	SAS 68P/F PIN:Au 15u BLACK	2	PCS
③	PCB	AQ-3-MS31037	MINISAS 68P PCB, FR4, 88±8 ohm	2	PCS
②	CABLE	AQ-3-MS20101	30AWG CABLE	A/R	M
①	CABLE	AQ-3-MS40206	(32AWG*2C+2d)*Al+MYLAR,OD:0.65*1.52MM,85±5 ohm	A/R	M

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	20/03/16

TOLERANCE INCHES MM		
.X	.015	.030
.XX	.010	.010
.XXX	.005	.005

OIKWAN® DONGGUAN AIQUN INDUSTRIAL CO.,LTD.

DRAWN BY	TONY CHAN	SCALE	NONE
		UNIT	MM
		SHEET	1/2
		DATE	22/03/16
CHECK BY			
CUSTOMER P/N:			

REV A

CUSTOMER:

DWG No.:AQ1617

TITLE:SLIMSAS 8I to SAS 68P+4P

P/N:AQ-1-MSA72P10500

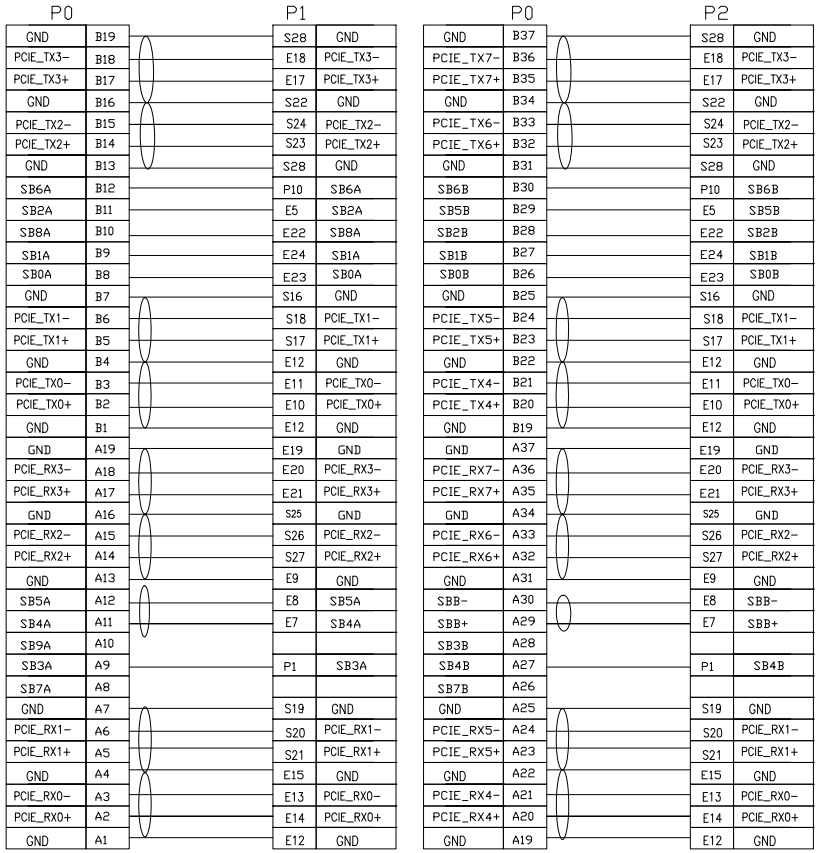

NOTE:
1.100%OPEN&SHORT TESTIGN,
2.INSULATION RESISTANCE 10M Ohm MIN DC300V
3.CONDUCTIVE RESISTANCE: 2 Ohm MAX

P1/P2	P1	P2	P3	P4	P5	P6	P7	P8	P9			P12	P13	P14	P15
P3/P4	----				P4P5P6		P7P8P9			P10P11P12			P13P14P15		
SYMBOL	----				GND		5V			GND			12V		
WIRE AWG	----				20AWG		20AWG			24AWG			20AWG		

REV	DESCRIPTION OF CHANGE	DATE
A	INITIAL RELEASE	20/03/16

TOLERANCE INCHES MM		
.X	.015	.030
.XX	.010	.010
.XXX	.005	.005

OIKWAN® DONGGUAN AIQUN INDUSTRIAL CO.,LTD.

SCALE	NONE	REV	A
UNIT	MM		
SHEET	2/2	CUSTOMER:	
DATE	22/03/16	DWG No.:AQ1617	
DRAWN BY	TONY CHAN		
CHECK BY		TITLE:SLIMSAS 8I to SAS 68P+4P	
CUSTOMER P/N:		P/N:AQ-1-MSA72P10500	