

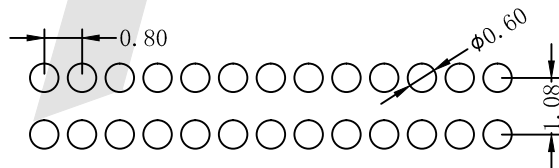
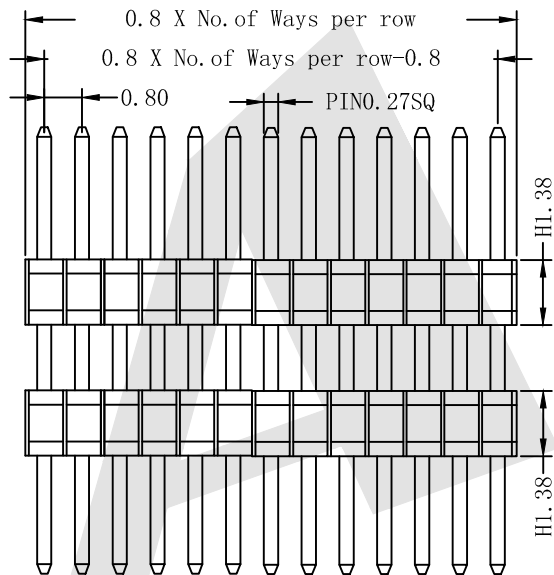


HSF

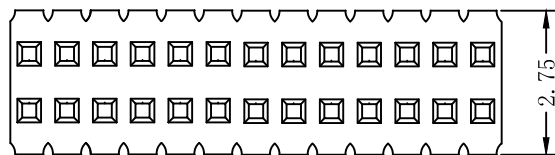

P. C. B LAYOUT

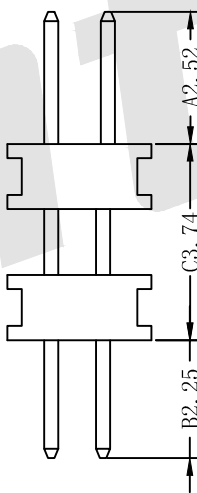

SPECIFICATIONS:

Current Rating: 0.75Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL 94V-0 Black

Ordering Code:

PHAS02 - X - X - D - A-C-B- X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type:
 D: Dual
- ⑤ Pin Length:
 A:0252=2.52mm
 C:0374=3.75mm
 B:0225=2.25mm
 Please mark the desired length in the A/C/B
- ⑥ Insulator Material:
 B:PA6T E:PA9T
 C:LCP
- ⑦ Packing:
 A:Tray
 B:Bag
 T:Tube
 U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP

Standard IE P/N : PHAS02-10-G0-D-0252-0374-0225-B-B

A	C	B	Unless Otherwise specified tolerance	
2.52	3.74	2.25	X. ±0.35 X.XX: ±0.20	X.X: ±0.25 X.XXX: ±0.15
Optional			SCALE: As Shown	UNIT: mm
DRAW YG ZHONG			DATE 11/25/2015	
CHECK BobYang			DATE 11/25/2015	

Antenk® ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE: 0.8 Pin Header Dual Row Double Plastic Straight Type

DRAWING NO: PHAS02-XXD-0252-0374-0225-XX
 PRODUCT NO: PHAS02-XXD-0252-0374-0225-XX

REV	Increase packing method and material	2016/10/25	
	DESCRIPTION	DATE	

