

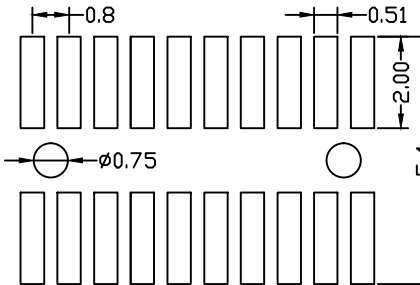
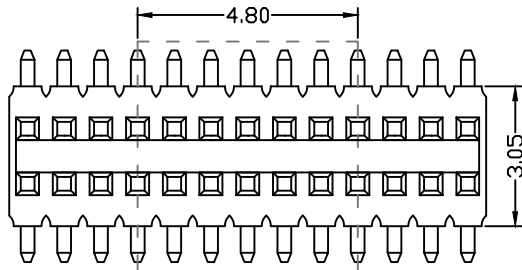


HSF

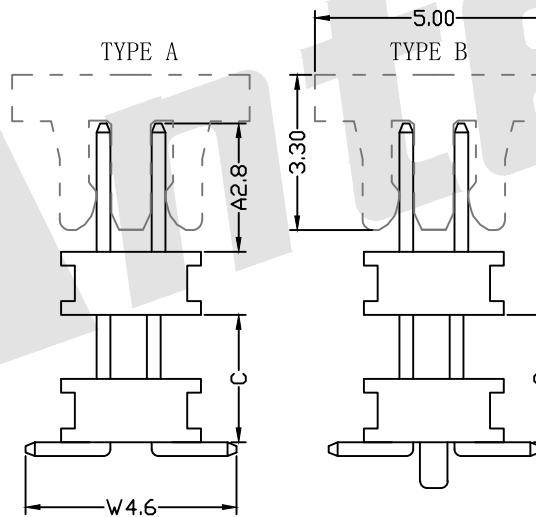

P. C. B LAYOUT

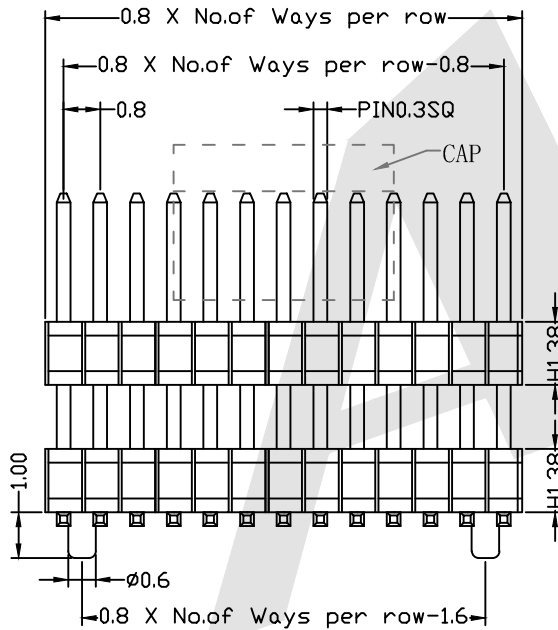

SPECIFICATIONS:

Current Rating: 0.75Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65° C to +125° C
 Contact Material: Brass
 Insulator Material: PA6T, UL 94V=0, Color:Black

Ordering Code:

PHAM02 - X - X - D - A - C - W - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts: 02 To 100
- ③ Contact Plating:
 G0:Gold flash S0:Selective
 G1:3u" Gold S1:Selective 3u"
 G2:5u" Gold S2:Selective 5u"
 G3:10u" Gold S3:Selective 10u"
 G4:15u" Gold S4:Selective 15u"
 G5:30u" Gold S5:Selective 30u"
 SN:Tin
- ④ Connector Type:
 D: Dual
- ⑤ Pin Length:
 A:0280=2.80mm
 C:0300=3.00mm
 W:0460=4.60mm
 Please mark the desired length in the A/C/W
- ⑥ Insulator Material:
 B:PA6T E:PA9T
 C:LCP
- ⑦ Packing:
 A:Tray B:Bag
 T:Tube U:Tube+CAP
 R:Tape&Reel
 W:Tape&Reel+CAP
- ⑧ With locating pegs option
 A:Type A without pegs
 B:Type B with pegs

Standard IE P/N :				PHAM02-10-G0-D-0280-0300-0460-B-B-B			
A	C	W	Unless Otherwise specified tolerance				
2.8	3.0	4.6	X. ±0.35	X.XX: ±0.20			
			X.X: ±0.25	X.XXX: ±0.15			
Optional			SCALE: As Shown	UNIT: mm	TITLE: 0.8mm Pin Header SMT Type Dual Row Double Plastic		
			DRAW YG ZHONG	DATE 11/25/2015	DRAWING NO: PHAM02-XXD-0280-0300-0460-XXX		
			CHECK BobYang	DATE 11/25/2015	PRODUCT NO: PHAM02-XXD-0280-0300-0460-XXX		
REV			DESCRIPTION		DATE		
1			Increase packing method and material		2016/10/25		

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

