


MATERIALS AND FINISH
 SHELL: steel material front shell nickel finished
 INSULATOR: PBT thermoplastic 30% glass
 filled UL 94V-0 rated pc99 color
 CONTACT MATERIAL: brass
 CONTACT FINISH: selective gold flash
 RIVITED INSERT: brass material nickel finished
 with #4-40 threaded riveted clinch nuts in back shell
ELECTRICAL CHARACTERISTICS
 CONTACT CURRENT RATING: 5.0A
 CONTACT RESISTANCE: 30 milliohms max
 DIELECTRIC WITHSTANDING VOLTAGE: 500 V AC MIN
 INSULATION RESISTANCE: 1000 megohms min
 TEMPERATURE RATING: -55 °C ~ +105 °C

Ordering Code:
 HDD03 - F - X - X - X - X - X

- ① Five Row Solder Type
- ② Contact Type:
F: Female
- ③ Contact NO.:
104=104pin
- Mounting Option:
A: No accessories
B: Rear Rivet
C: Front Rivet
D: Groudstand-off on rear shell
E: Front rivet+Groudstand-off on rear shell
- ⑤ Accessories:
O: Non Accessories
A: Zinc alloy 4.8mm Nickel
A1: Zinc alloy 5.8mm Nickel
B: Iron 4.8mm Nickel
B1: Iron 5.8mm Nickel
C: Copper alloy 4.8mm Nickel
C1: Copper alloy 5.8mm Nickel
D: Copper screw 4.8mm Nickel
D1: Copper screw 5.8mm Nickel
- ⑥ Color Code:
W: White L: Blue
B: Black G: Grey
- ⑦ Contact Plating
S: Selective Gold
S1: Selective 3u" Gold
S2: Selective 5u" Gold
S3: Selective 10u" Gold
S4: Selective 15u" Gold
S5: Selective 30u" Gold
G0: Gold flash
G1: 3u" Gold over
G2: 5u" Gold over
G3: 10u" Gold over
G4: 15u" Gold over
G5: 30u" Gold over

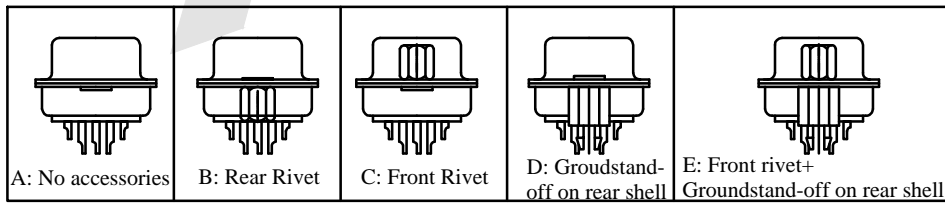

Unless Otherwise specified tolerance	
X ±0.35	X.XX ±0.20
X.X ±0.25	X.XXX ±0.15
SCALE: As Shown	UNIT: mm
DRAW Lv Xun Hua	DATE 27/03/2019
CHECK BobYang	DATE 27/03/2019

Antenk ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:
D-SUB Female 5 row high density solder 104P(stamped pin)

DRAWING NO: HDD03-FXXXXX
 PRODUCT NO: HDD03-FXXXXX

D

REV	DESCRIPTION	DATE

