

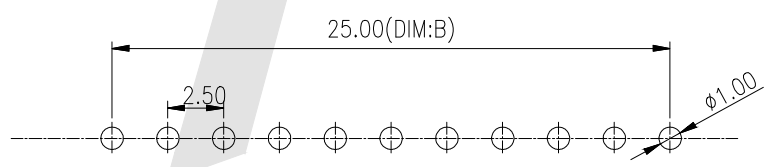



HSF

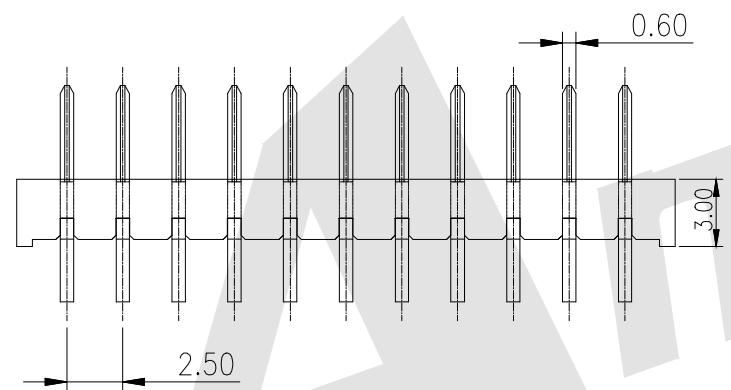

No. of Pins	Dimension	
	DIM.B	DIM.A
03	5.00	9.50
04	7.50	12.00
05	10.00	14.50
06	12.50	17.00
07	15.00	19.50
08	17.50	22.00
09	20.00	24.50
10	22.50	27.00
11	25.00	29.50
12	27.50	32.00

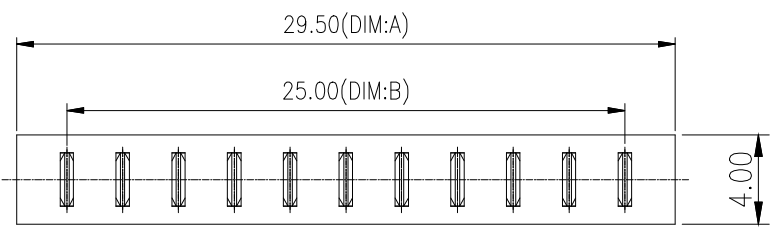

RECOMMENDED PCB LAYOUT  
Layout Tolerance ±0.05

**MATERIAL:**  
 1. CURRENT RATING:7 A  
 2. INSTANT CURRENT:10 A  
 3. WITHSTAND VOLTAGE:500 V  
 4. INSULATION RESISTANCE:100 MΩ MIN  
 5. CONTACT RESISTANCE:30 mΩ MAX  
 6. OPERATION TEMPERATURE:-40° C TO +105° C

**SPECIFICATIONS:**  
 1. INSULATOR:NYLON 9T (UL94V-0)  
 2. CONTACT:PHOSPHOR BRONZE  
 3. CONTACT PLATED:GOLD OVER NICKEL OR TIN

**Ordering Code:**  
 ABT34 - 11 - 9 - B - G0 - B

① Series No:	⑤ Contact Plating:
② No. of Contacts 11:11Pin	G0:Gold flash
③ Insulator Material: P:PBT+30%GF L:LCP 9:PA9T	G1:3u" gold G2: 5u" gold G3:10u" gold G4:15u" gold G5:30u" gold
④ Pitch B:2.5mm Pitch	⑥ Packing: A:Tray B:Bag C:Tube D:Tape Reel

Unless Otherwise specified tolerance	
X. ±0.35	X.XX: ±0.20
X.X: ±0.25	X.XXX: ±0.15
SCALE: As Shown	UNIT: mm
DRAW Wu Feng Rong	DATE 13/08/2020
CHECK BobYang	DATE 13/08/2020

**Antenk** ANTENK ELECTRONICS CO.,LTD  
 Http://www.antenk.com  
 E-mail:sales@antenk.com

TITLE:  
2.50 PITCHES 11 PIN BATTERY 180° MALE CONNECTOR

DRAWING NO: ABT34-119BG0B  
 PRODUCT NO: ABT34-119BG0B

REV	DESCRIPTION	DATE

