

HSF
ROHS
SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40°C~+105°C



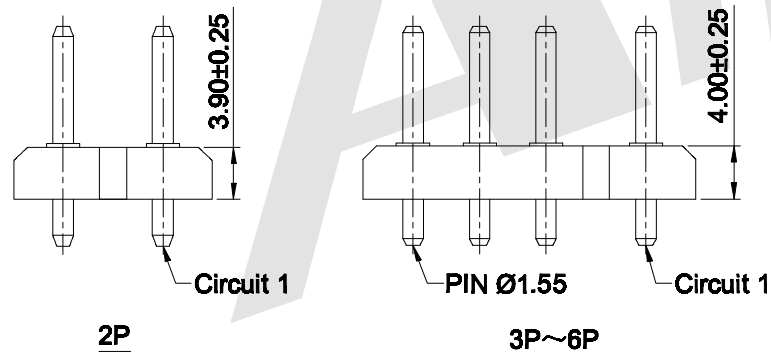
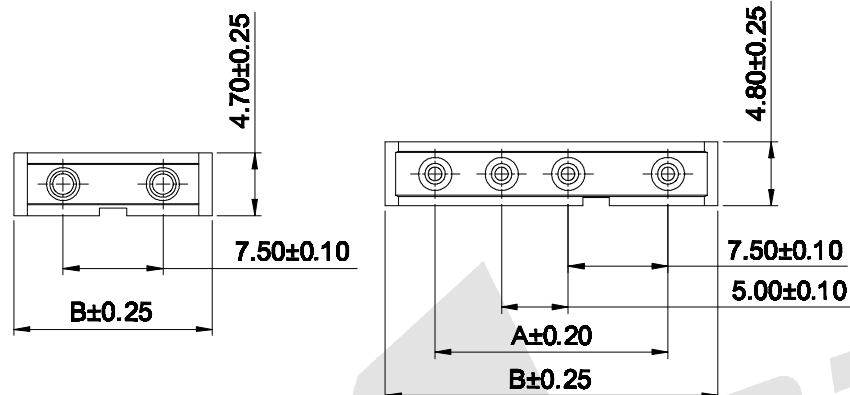
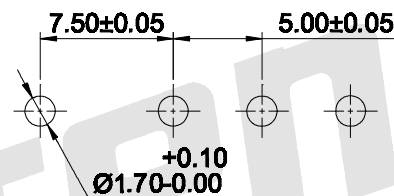
WAFER

- Part NO: AW1561VA-xP
- Material: Pin: Brass/Tin over Nickel
Insulator: Nylon 66, UL94V-0
- Mates with: AH1561A series Housing
- Color: White

Ordering Information & Dimensions:

Poles	Part No.	Dimensions (mm)	
		A	B
02	AW1561VA-02P	7.50	14.90
03	AW1561VA-03P	12.50	20.00
04	AW1561VA-04P	17.50	25.00
05	AW1561VA-05P	22.50	30.00
06	AW1561VA-06P	27.50	35.00

Unit:mm

P.C.B LAYOUT

Unless Otherwise specified tolerance
 I ±0.35 I, XX: ±0.20
 I, X: ±0.25 I, XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW Jack Bao DATE 12/15/2017
 CHECK Bob Yang DATE 12/15/2017



Antenk ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

TITLE: 7.50-5.00mm pitch 180° Wafer Connector Series

DRAWING NO: AW1561VA-xP

PRODUCT NO: AW1561VA-xP

REV DESCRIPTION

DATE

1 2 3 4 5 6 7 8