



SPECIFICATIONS

- Current rating: 7A AC/DC
- Voltage rating: 250V AC/DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -40°C~+105°C
- Compliant with RoHs and REACH


HOUSING

- Part NO. : AH1561-xP
- Suitable: AT1561T series Terminal
- Mates with: AW1561 series Wafer
- Material: Nylon 66, UL94V-0
- Color: White

Ordering Information & Dimensions:

Poles	Part No.	Dimensions (mm)	
		A	B
01	AH1561-01P	—	5.80
02	AH1561-02P	7.50	12.50
03	AH1561-03P	12.50	17.50
04	AH1561-04P	17.50	22.50
05	AH1561-05P	22.50	27.50
06	AH1561-06P	27.50	32.50

Unit:mm

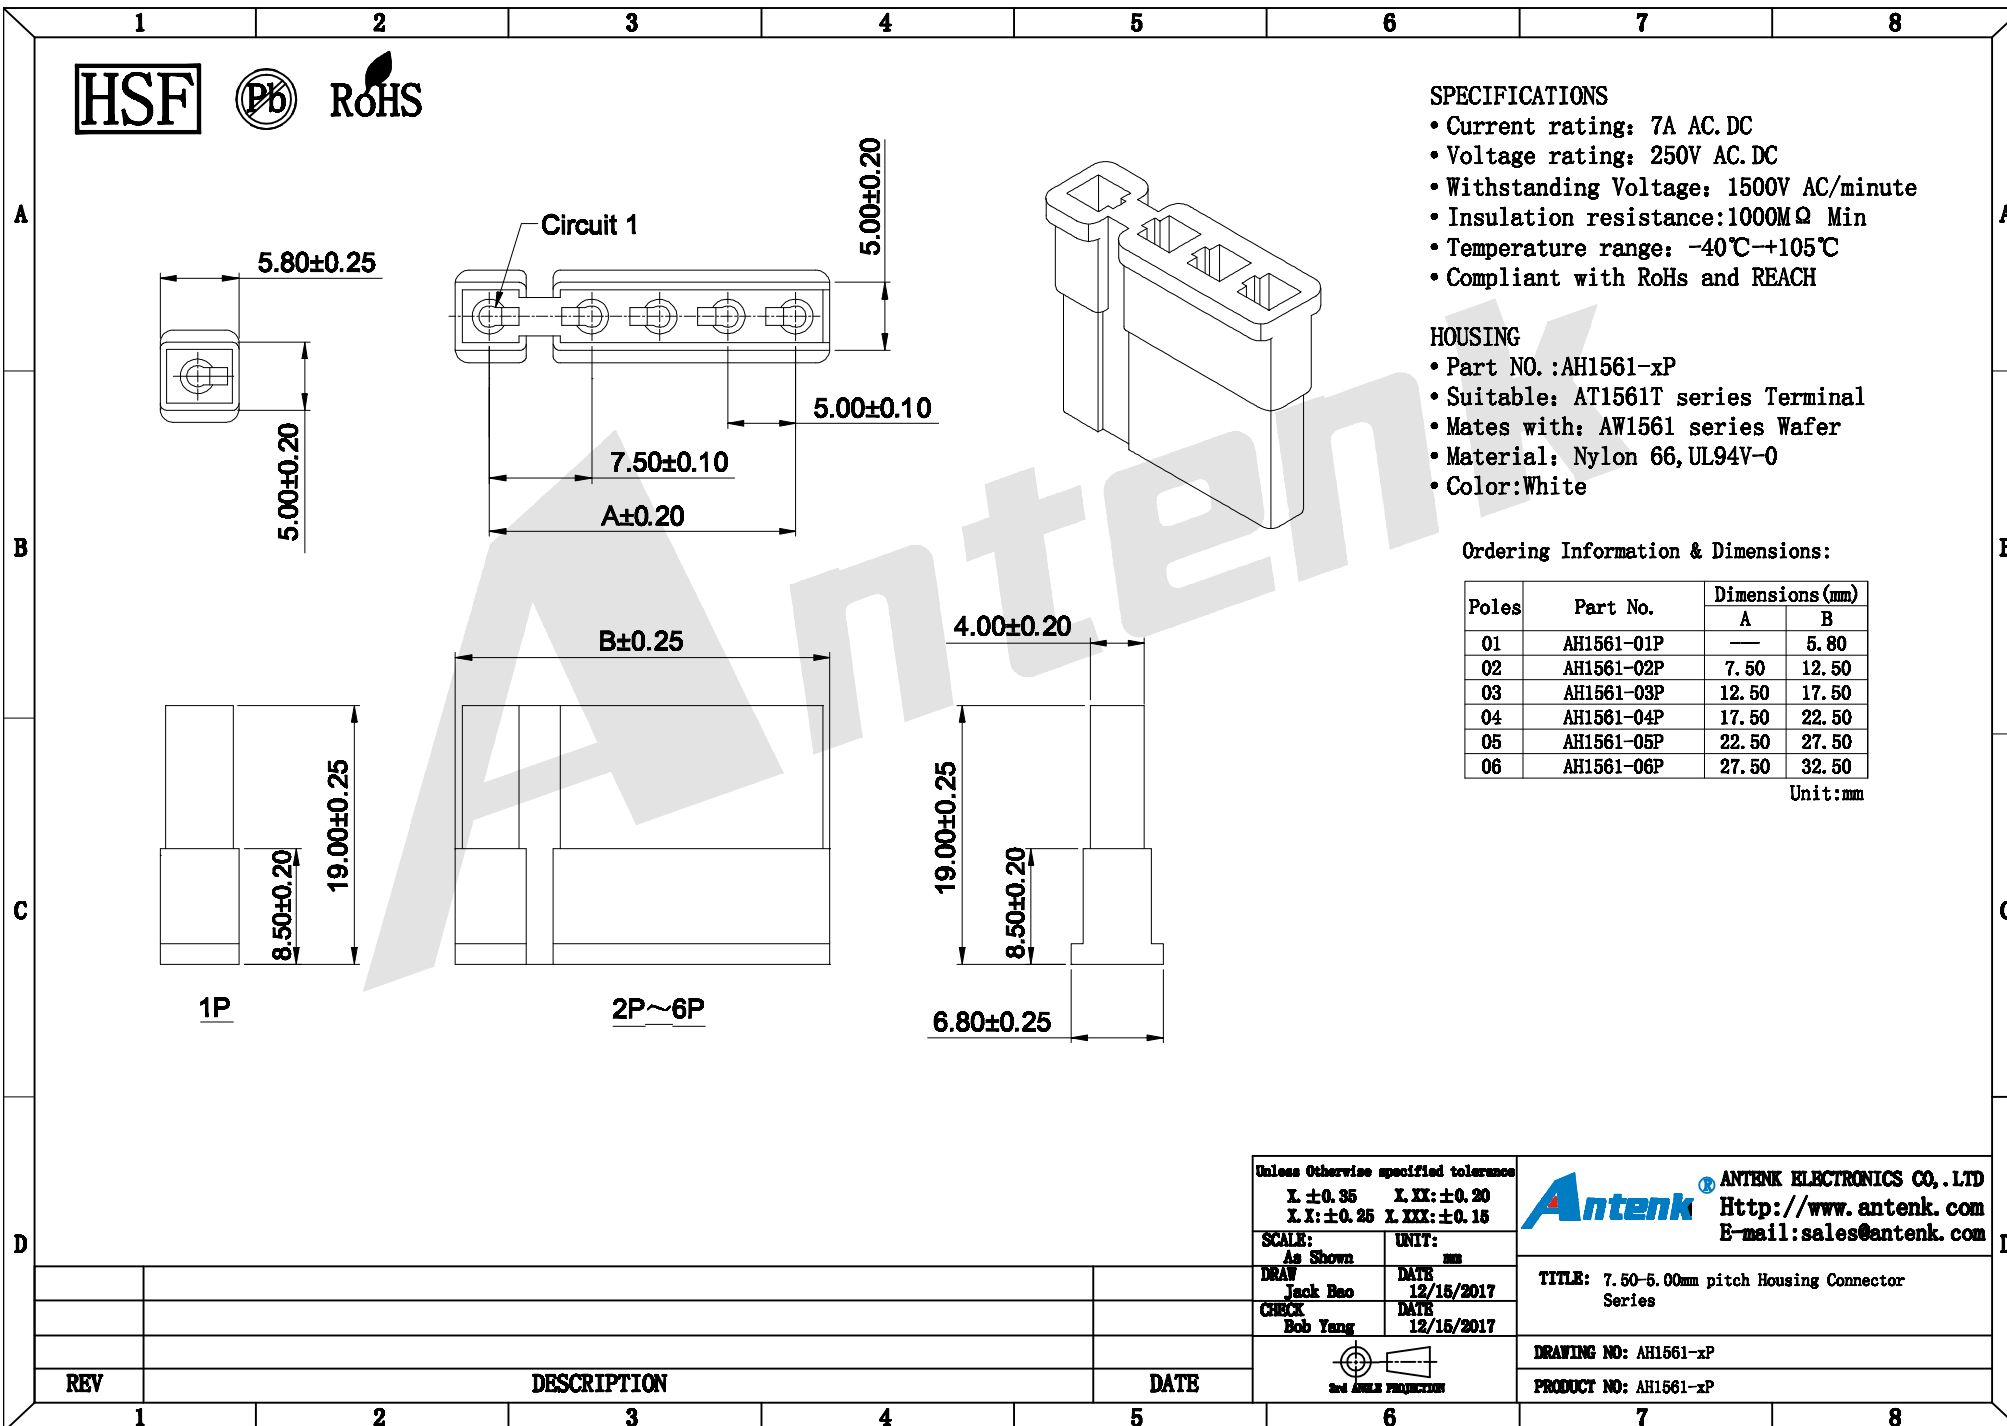

Unless Otherwise specified tolerance
 X ±0.35 X XX: ±0.20
 X X: ±0.25 X XXX: ±0.15

SCALE: As Shown UNIT: mm
 DRAW Jack Bao DATE 12/15/2017
 CHECK Bob Yang DATE 12/15/2017

Antenk © ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

TITLE: 7.50-5.00mm pitch Housing Connector Series

DRAWING NO: AH1561-xP

PRODUCT NO: AH1561-xP



REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		