

**HSF**

**RoHS**
**SPECIFICATIONS**

- Current rating: 7A AC/DC
- Voltage rating: 250V AC/DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M $\Omega$  Min
- Temperature range: -40 $^{\circ}$ C~+105 $^{\circ}$ C
- Compliant with RoHs and REACH





**HOUSING**

- Part NO. : AH1561A-xP
- Suitable: AT1561T series Terminal
- Mates with: AW1561VA series Wafer
- Material: Nylon 66, UL94V-0
- Color: White

**Ordering Information & Dimensions:**

Poles	Part No.	Dimensions(mm)	
		A	B
02	AH1561A-02P	7.50	12.50
03	AH1561A-03P	12.50	17.50
04	AH1561A-04P	17.50	22.50
05	AH1561A-05P	22.50	27.50
06	AH1561A-06P	27.50	32.50

Unit:mm

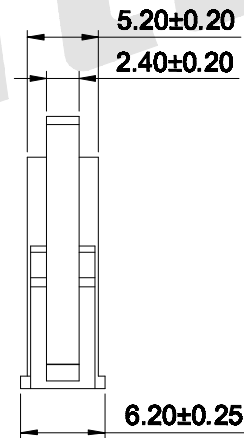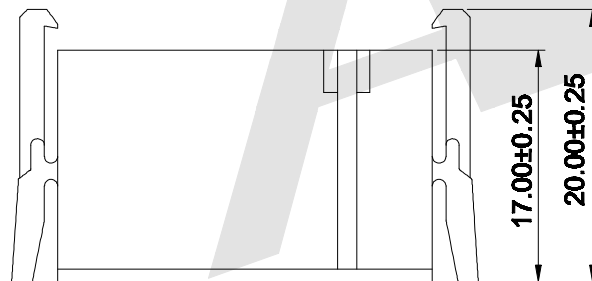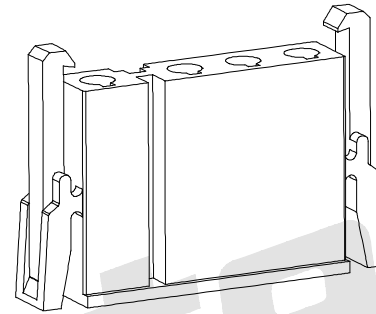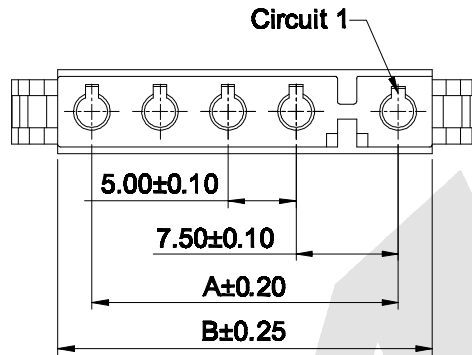

Unless Otherwise specified tolerance  
 I  $\pm$  0.35 I, XX:  $\pm$  0.20  
 I, X:  $\pm$  0.25 I, XXX:  $\pm$  0.15

SCALE: As Shown UNIT: mm  
 DRAW Jack Bao DATE 12/15/2017  
 CHECK Bob Yang DATE 12/15/2017



**Antenk** ANTENK ELECTRONICS CO., LTD  
[Http://www.antenk.com](http://www.antenk.com)  
 E-mail:sales@antenk.com

TITLE: 7.50-5.00mm pitch Housing Connector Series

DRAWING NO: AH1561A-xP

PRODUCT NO: AH1561A-xP

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8