
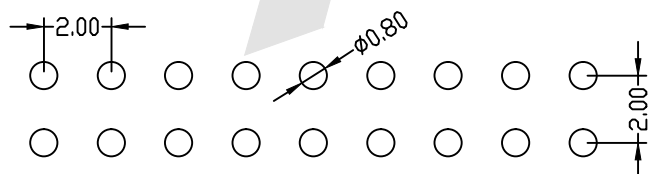
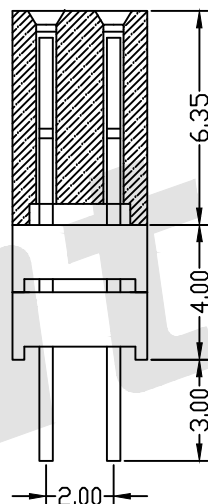
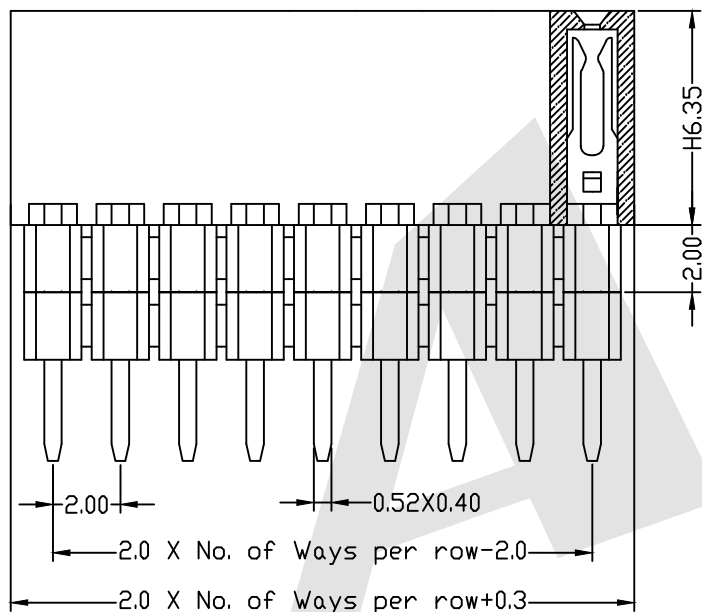


HSF

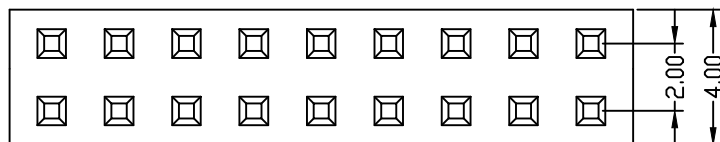

PCB LAYOUT

### SPECIFICATION

Current Rating: 1.5Amp  
 Insulation Resistance: 1000M ohms min  
 Contact Resistance: 20M ohms max  
 Dielectric Withstanding: AC500V  
 Operating Temperature: -65°C to +125°C  
 Contact Material: Brass  
 Insulator Material: PA6T,UL 94V-0 Black

Ordering Code:

PC104D03 - X - X - D - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contacts  
02 To 80
- ③ Contact Plating:  
 G0:Gold flash S0:Selective  
 G1:3U" Gold S1:Selective 3u"  
 G2:5u" Gold S2:Selective 5u"  
 G3:10u" Gold S3:Selective 10u"  
 G4:15u" Gold S4:Selective 15u"  
 G5:30u" Gold S5:Selective 30u"  
 SN: Tin
- ④ Connector Type  
D: Dual
- ⑤ Plastic High:  
H: 6.35
- ⑥ Insulator Material  
 A: PBT  
 B: PA6T  
 C: LCP  
 D: PA46  
 E: PA9T
- ⑦ Packing  
 A: Tray  
 B: Bag  
 T: Tube  
 U: Tube+CAP  
 R: Tape&Reel  
 W: Tape&Reel+CAP

Please mark the desired length in the H

Unless Otherwise specified tolerance  
 X. ±0.35 X.XX: ±0.20  
 X.X: ±0.25 X.XXX: ±0.15

**Antenk** ANTENK ELECTRONICS CO.,LTD  
[Http://www.antenk.com](http://www.antenk.com)  
 E-mail:sales@antenk.com

SCALE: As Shown UNIT: mm  
 DRAW YG ZHONG DATE 01/05/2016  
 CHECK BobYang DATE 01/05/2016

TITLE: 2.00mm Female Header Dual Row  
 Straight Type Add Two Housing H=6.35



DRAWING NO: PC104D03-XXDXXX

PRODUCT NO: PC104D03-XXDXXX

REV	DESCRIPTION	DATE